




**CLICK TO ENLARGE**

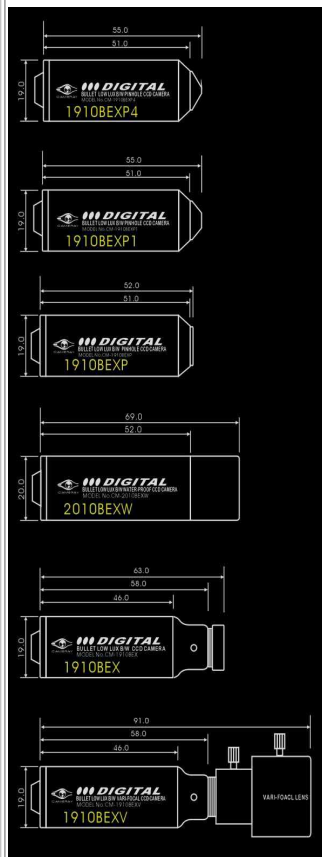

## BULLET LOW LUX B/W CAMERA

### CM-1910BEX Series

|                       |                               |                         |                         |                               |                         |                  |
|-----------------------|-------------------------------|-------------------------|-------------------------|-------------------------------|-------------------------|------------------|
| MODEL No.             | CM-1910BEX                    | CM-1910BEXP             | CM-1910BEXP1            | CM-1910BEXP4                  | CM-1910BEXV             | CM-2010BEXW      |
| Picture               |                               |                         |                         |                               |                         |                  |
| Image Device          | 1/3" Sony Ex-view B/W CCD     |                         |                         |                               |                         |                  |
| Number of Pixels      | CCIR: (H)500x(V)582           |                         |                         |                               |                         |                  |
| Scanning System       | CCIR: 625 Lines, 50 Field/Sec |                         |                         |                               |                         |                  |
| Sync System           | Internal Synchronization      |                         |                         |                               |                         |                  |
| Horizontal Resolution | 420 TV Line                   |                         |                         |                               |                         |                  |
| Video output          | 1Vp-p 75 Ohm , Negative       |                         |                         |                               |                         |                  |
| White Balance         | Auto                          |                         |                         |                               |                         |                  |
| S/N Ratio             | More Than 46dB                |                         |                         |                               |                         |                  |
| Gamma Characteristic  | 0.45                          |                         |                         |                               |                         |                  |
| Minimum Illumination  | 0.001Lux                      |                         |                         |                               |                         |                  |
| Electronic Shutter    | CCIR : 1/50~1/100,000 Sec     |                         |                         |                               |                         |                  |
| Built-In Lens         | 3.6mm board lens              | 3.7mm flat pinhole lens | 3.7mm cone pinhole lens | 3.7mm super cone pinhole lens | 3.5-8mm Vari-focal lens | 3.6mm board lens |
| Power Consumption     | 12V±10%DC, 100mA              |                         |                         |                               |                         |                  |
| Operation Temperature | -10°C ~ + 50°C, RH 95% Max    |                         |                         |                               |                         |                  |
| Storage Temperature   | -20°C ~ + 60°C, RH 95% Max    |                         |                         |                               |                         |                  |
| Housing               | Black                         |                         |                         |                               |                         |                  |
| Dimension             | Ø19x62mm                      | Ø19x50mm                | Ø19x54mm                | Ø19x56mm                      | Ø19x91mm                | Ø20x69mm         |
| EIA System            | Available                     |                         |                         |                               |                         |                  |

Lens Optional

