




CLICK TO ENLARGE

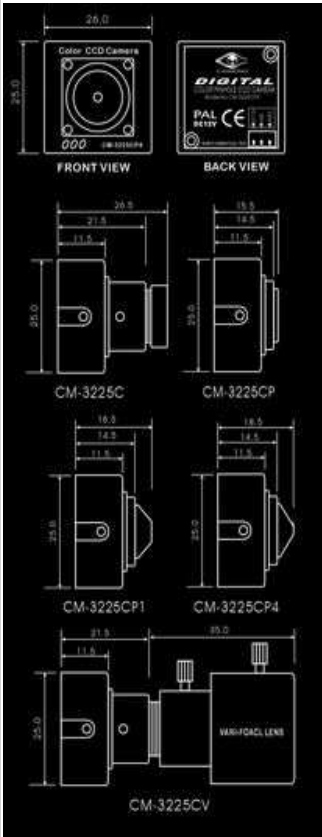

SUPER MINIATURE COLOR CAMERA

CM-3225C Series

| MODEL No. | CM-3225C | CM-3225CP | CM-3225CP1 | CM-3225CP4 | CM-3225CV |
|-----------------------|--|---|---|---|---|
| Picture |  |  |  |  |  |
| Image Device | 1/3" Sharp CCD | | | | |
| Number of Pixels | PAL: (H)500x(V)582 | | | | |
| Scanning System | PAL: 625 Lines, 50 Field/Sec | | | | |
| Sync System | Internal Synchronization | | | | |
| Horizontal Resolution | 420 TV Line | | | | |
| Video output | 1Vp-p 75 Oms , Negative | | | | |
| White Balance | Auto | | | | |
| S/N Ratio | More Than 46dB | | | | |
| Gamma Characteristic | 0.45 | | | | |
| Minimum Illumination | 1.0 Lux | | | | |
| Electronic Shutter | PAL : 1/50~1/100,000 Sec | | | | |
| Built-In Lens | 3.6mm board lens | 3.7mm flat pinhole lens | 3.7mm cone pinhole lens | 3.7mm super cone pinhole lens | 3.5-8mm Vari-focal lens |
| Power Consumption | 12V±10%DC, 100mA | | | | |
| Operation Temperature | -10°C ~ + 50°C, RH 95% Max | | | | |
| Storage Temperature | -20°C ~ + 60°C, RH 95% Max | | | | |
| Housing | Black | | | | |
| Dimension | 25x25mm(Details click the pic. on the left) | | | | |
| NTSC System | Available | | | | |

Lens Optional

